


BALOGH



WWW.BALOGHRFID.COM

OLR Tag Series

Industrial Read-Only Tags

2 Byte

Passive Industrial RFID Tags

Orange Product Range




Common Tag Characteristics

- Read-Only
- No needed power source (Passive Technology)
- -25°C up to 85°C Operating Temperature
- Rislun Housing with Urethane Potting
- IP 65 Case Rating (OMA-931 is IP-67)

Tag Environment

- OLR Series tags can be mounted recessed in metal, as long as a metal free clearance on the sides of the tag is observed.
- Please use the chart below to see specific metal clearance tolerances for each GIE Tag.

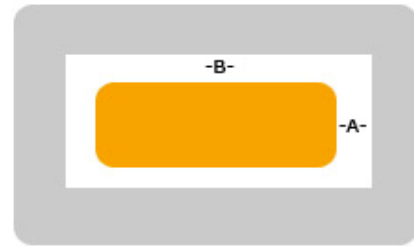

Transceiver Compatibility Chart

Tag Style	ERL-120x80	Memory	Weight	Distance Between Tags	Metal Clearance	
85	550 mm	2 Byte	600 g	750 mm	A and B ≥ 10 mm	

OLR Tags

OLR-85

