


BALOGH

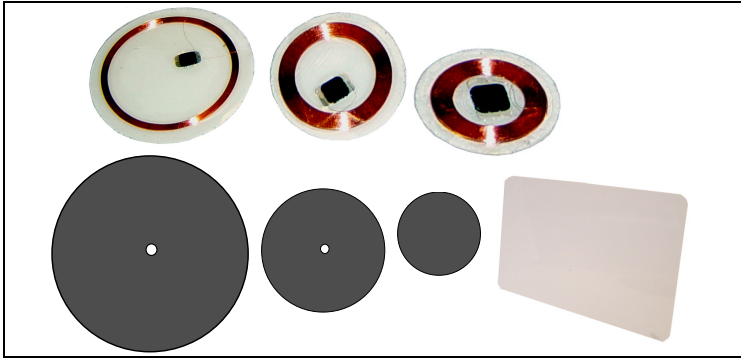


WWW.BALOGHRFID.COM

TAI Tag Series Light Industrial Read/Write Tags

Passive Industrial RFID Tags

Gray Product Range

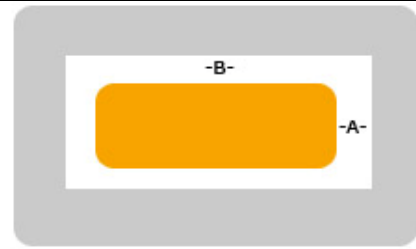


Common Tag Characteristics

- Available Memory 48 Bytes
- EEPROM Memory
- Operating Temperature -25 to 70 °C
- IP-65 and IP-67 Rated Tags Available

Tag Environment

- Please use the chart below to see specific metal clearance tolerances for each TAF Tag.



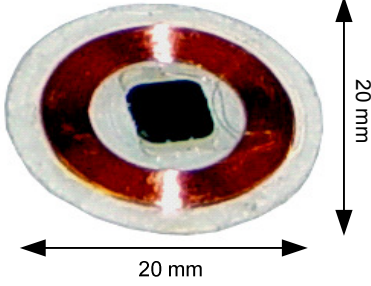



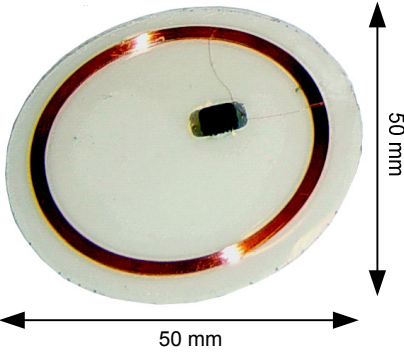
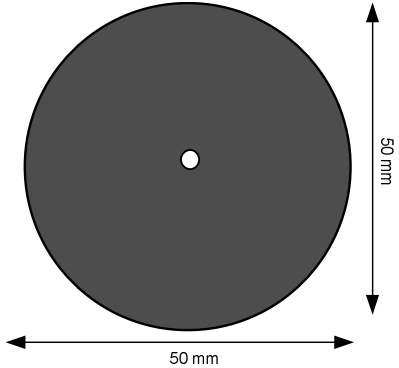
Transceiver Compatibility Chart

Tag Style	TCI-40	TCI-100	MOI-100	Memory	Metal Clearance	
20 (Label)	40 mm	85 mm	--	48 Bytes	20 mm	
30 (Label)	40 mm	85 mm	--	48 Bytes	20 mm	
50 (Label)	80 mm	155 mm	20 mm	48 Bytes	20 mm	
ISO	90 mm	175 mm	17 mm	48 Bytes	20 mm	
20 (Disc)	40 mm	85 mm	--	48 Bytes	20 mm	
30 (Disc)	40 mm	85 mm	--	48 Bytes	20 mm	
50 (Disc)	80 mm	155 mm	--	48 Bytes	20 mm	

Distance Between Tags and Other Information

Tag Style	TCI-40	TCI-100	MOI-100	Weight		
20 (Label)						
30 (Label)						
50 (Label)						
ISO						
20 (Disc)						
30 (Disc)						
50 (Disc)				5.7 g		

TAI Tags

TAI-20 Label	TAI-20 Disc
	
TAI-30 Label	TAI-30 DISC
	
TAI-50 Label	TAI-50 Disc
	

TAI ISO Card

